


What's included:



Foam pump, alcohol towelette, wall anchors and screws, foam adhesive strips, dispenser key and 4 C-cell batteries.

To Change Batteries:

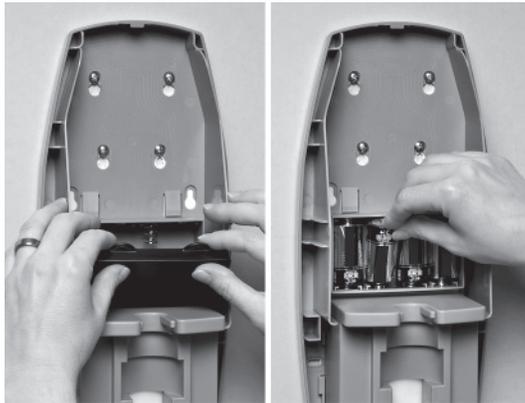

Before replacing batteries, remove bag of product and pump assembly from dispenser.

1. Use tabs to remove battery cover.
2. Use 4 high-quality C-cell alkaline batteries.
3. Replace battery cover. Close dispenser cover. Status light on front of dispenser will be green when batteries are installed properly.
4. Be sure to install bag of product and pump assembly back into the dispenser.

Clario™ TF

PRE-WORK
CLEANSE
AFTER-CARE

Status Light:

- **Green Flash every 4 seconds - Batteries Working, Unit Working**
- **Fast Green Flash - Hand/Object obstructing sensor. Remove hand/object to reset dispenser.**
- **Red Flash every 4 seconds - Batteries Low.**
- **Red Flash - Unit Failure. Open dispenser cover to reset unit.**

Note:

- **Dispenser should be mounted at least 6 inches above any surface or object.**
- **If installed above stainless steel or glossy surfaces at least a 9" mounting height is recommended.**

Clario™ TF

DISPENSER INSTRUCTIONS



BETCO®

**INNOVATIVE
CLEANING TECHNOLOGIES**

©2009 Betco Corporation
All Rights Reserved.
1001 Brown Avenue
Toledo, Ohio 43607-0127
888-GO BETCO • www.betco.com

Item #91864-92

BETCO®

CAUTION:

Correct installation of this unit to ensure proper function and safety is the responsibility of the installer. Please completely read and understand this cautionary note and all installation or maintenance instructions before proceeding with installation.


Opening the Clario™ TF Dispenser:



1. To open the Clario™ TF dispenser cover, insert key into keyway at the top of the dispenser. Turn key clockwise to open and counterclockwise to lock cover.

Mounting the Clario™ TF Dispenser with Anchors and Screws:

(Recommended mounting method, anchors and screws are included.)

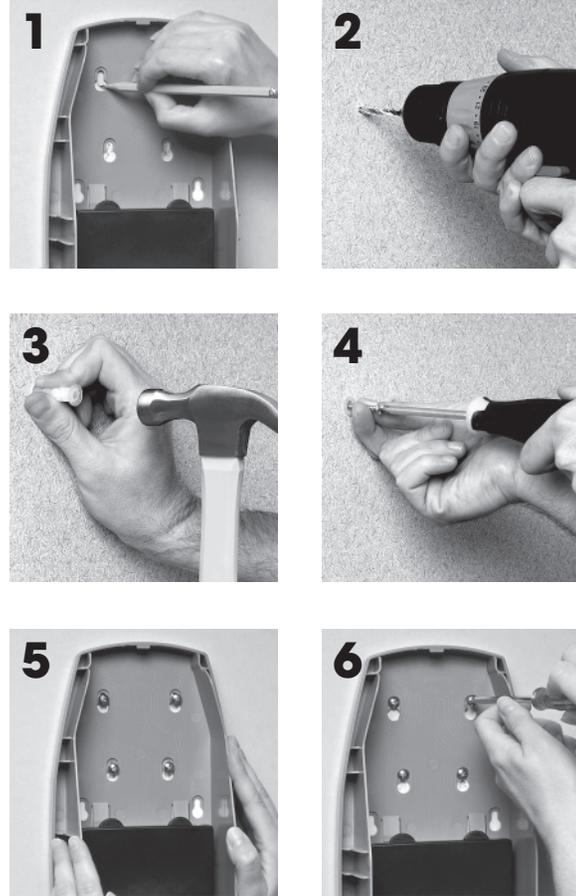

1. Using dispenser as a template, mark hole locations on wall. **(To be in compliance with ADA regulations, the dispenser should be mounted no more than 48" from the ground.) NOTE: Dispenser should be installed at least 6" above countertop.**
2. Drill (4) 3/16" diameter holes.
3. Tap plastic anchors provided into holes.
4. Place screws into anchors and tighten half the screw length.
5. Hang dispenser over screws using the keyholes in the back plate of the dispenser.
6. Tighten screws to secure the dispenser.

Mounting the Clario™ TF Dispenser with Double-Sided tape:

(Double-sided tape should only be used to secure the unit to smooth, flat, dry surfaces that do not have chemical residue or coatings on them. Surfaces should be thoroughly clean and dry.)


1. Wipe surface with supplied alcohol wipe immediately before applying tape.
2. **(To be in compliance with ADA regulations, the dispenser should be mounted no more than 48" from the ground.) NOTE: Dispenser should be installed at least 6" above countertop.** Peel off paper from back of tape. Press dispenser firmly to the wall and hold for several seconds to make sure tape has completely adhered to the wall.
3. It is recommended that the dispenser is not filled with soap or batteries for 24 hrs. to ensure that the tape has completely adhered to the wall before weight is added to the dispenser.

Install/Remove Product into Clario™ TF Dispenser with QCT™ Connector:



Installing Product:

1. Turn bag upside down. Insert pump valve assembly completely into valve end of bag until it clicks and bag is fully pressed into pump.
2. Turn product and pump right-side up and insert bag and pump into the dispenser. Ensure pump is inserted snugly into motor housing in dispenser.
3. If needed, gently tuck corners of bag to ensure complete closure of dispenser cover.



Removing Product:

1. Pull bag and pump assembly out of dispenser.
2. Turn bag and pump assembly upside down to remove pump from bag.